

## MM1200

### Mag Lock Magnet

#### Features:



- Standard Stainless Steel Magnet
- Operating voltage 12 ~ 24V DC
- Holding force up to 1200Lbs (545kg)
- Weather resitant: IP67
- DC integral door monitoring circuit
- Vandal resistant
- Standard or face fix
- Weight 5Kg



#### TECHNICAL DATA

	MM1200
Voltage tolerance	±15%
Current draw	460mA at 12V DC, (at temperature 20°C)
Operating temperature	-10~55°C (14 to 131°F)
Locks surface temperature	Current temperature ±20% (when power is on)
Humidity	0~95% non-condensing
Magnetic bond sensor monitor output remotely monitors the door lock or unlock status	N.C Output-Door opened; N.O Output-door closed (SPDT rated 0.25A at 12V DC)
Finish	Special Zinc finish for magnet and armature plate

#### Dimensions:

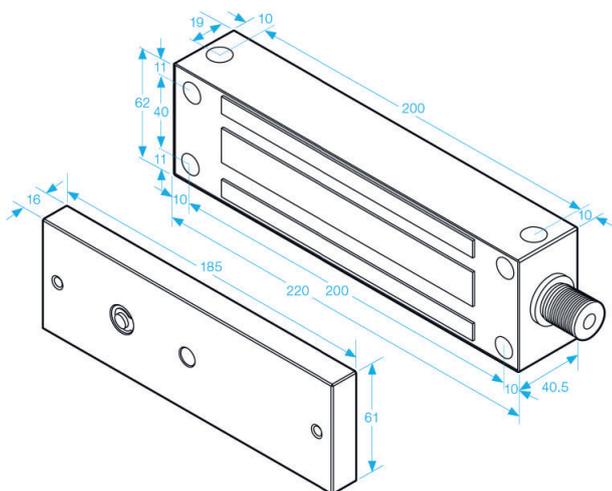

12Vdc



24Vdc

#### Reed Sensor Contact



#### CAUTION

Before applying power  
set wiring correctly.