




CDNVS-60 Video combiner - to an installation box 60 mm

Video combiner for digital systems. Used when there is a need to connect an external analog camera or other video source to systems without a camera. The module converts the PAL signal into a differential video signal (transmitted via a cat. 5e or 6 twisted pair cable). It can also be used to connect a second camera: in INS-MP7 monitors or to the camera switch module (VIDEO-SW2 MINI-60). Module without housing for mounting in a Ø60 mm installation box. Compatible with digital group devices: CDNP, Inspiro and Familio.

Index	CDNVS-60
Description	Video combiner for an installation box Ø60 mm
Material	Foamed PVC housing (bottom)
Dimensions (mm)	35x50x17,5
Installation type	Digital: twisted-pair cat. 5e or 6
Power supply	15VDC / 40mA
Stand-by power consumption	~0,6W
Outputs	ARK screw connections: - VIDEO differential signal outputs - power supply connection for external camera (12V, max 200mA)
Inputs	ARK screw connections: - PAL video signal connection (75 Ohm) - power connection
Attributes	 compatible with PAL video signal (75 Ohm) possibility of connecting an external analog camera to ACO video systems allows the connection of a second camera in the monitors INS-MP7 is located in an installation box with a diameter of 60mm compatible with CDNP, Inspiro, COMO / Familio-P/PRO


ACO © All rights reserved 1/3

Schema

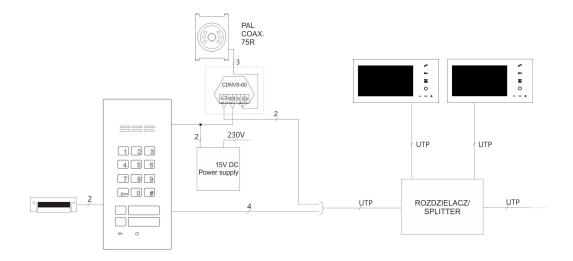

ACO © All rights reserved 2 / 3

Dimensions

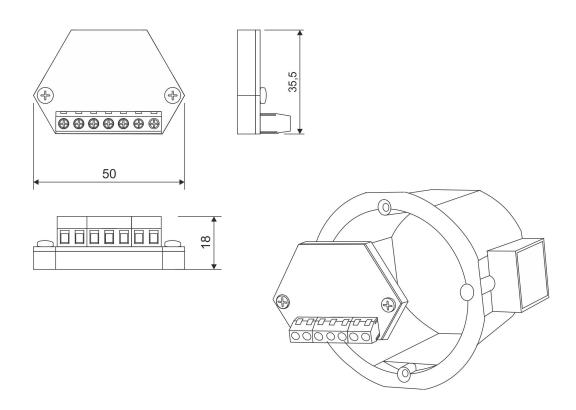

ACO © All rights reserved 3 / 3